

Solid State Contactor



Engineered specifically for high current draw applications such as proportioner pumps, FoamPro's solid state DC contactor offers many advantages over mechanical solenoid contactors. Technologically-advanced solid state components are designed to manage in-rush greater than 1,000 amps and over 70 amps continuous current. With zero battery draw in the "off" state, this contactor is a perfect master power disconnect switch. Installation directly in the battery cable, with smaller gauge wires routed to a remote activation switch, makes this an ideal relay for FoamPro's Advanced Feature Controller "Auto-On" function.

Superior performance is delivered by the extremely low "On" resistance. This efficient DC power switch provides minimal voltage drop and generates less internal heat, eliminating the need for external heat sinks. Advanced embedded controller provides overload and circuit protection resulting in longer life and greater reliability.

Packaged in an environmentally-sealed case, it includes four mounting hole pads and a #8-32 phosphor bronze stud connection for remote switching. Connections for the high current DC cables utilize 1/4"-20 threaded phosphor bronze studs with brass contact pads for low contact resistance.

Features & Benefits:

- Longer-life, solid state design
- Remote Start/Stop capability
- Overload current limit protection
- Zero standby current draw
- Automatic reset with power cycle
- Environmentally-sealed aluminum housing



Solid State Contactor

SPECIFICATIONS

Superior Performance

Battery Voltage: +10 to +29 VDC

Maximum Current Rating

Direct Short: ≥ 1000 Amp
 Continuous: ≥ 70 Amp
 Overload Protection: ≤ 80 Amp

Ground Control Input

On: CHASSIS GROUND
 Off: OPEN
 Activation Current: ≤ 30 mA MAX

Activation Time

On: ≤ 25 ms
 Off: ≤ 2 ms
 Overload Disconnect: ≤ 25 ms (80-250Amp)
 ≤ 5 ms(>250Amp)

Contact Resistance

On: ≤ 1.0 m Ω
 Off: ≥ 250 K Ω

Operating Temperature

-40 to +160 °F (-40 to 70 °C)

Terminals

Power: Two (2) 1/4 – 20 threaded phosphor bronze ET-plated studs, brass nuts, phosphor bronze lock washers and rubber terminal boot covers

Ground Control:

One (1) 8 – 32 threaded phosphor bronze ET-plated studs with brass nuts


Weight

0.30 lbs. (0.136 kg)

Dimensions

2.5 x 2.5 x 0.33 inches
 (63.5 x 63.5 x 8.4 mm)

Installation Example

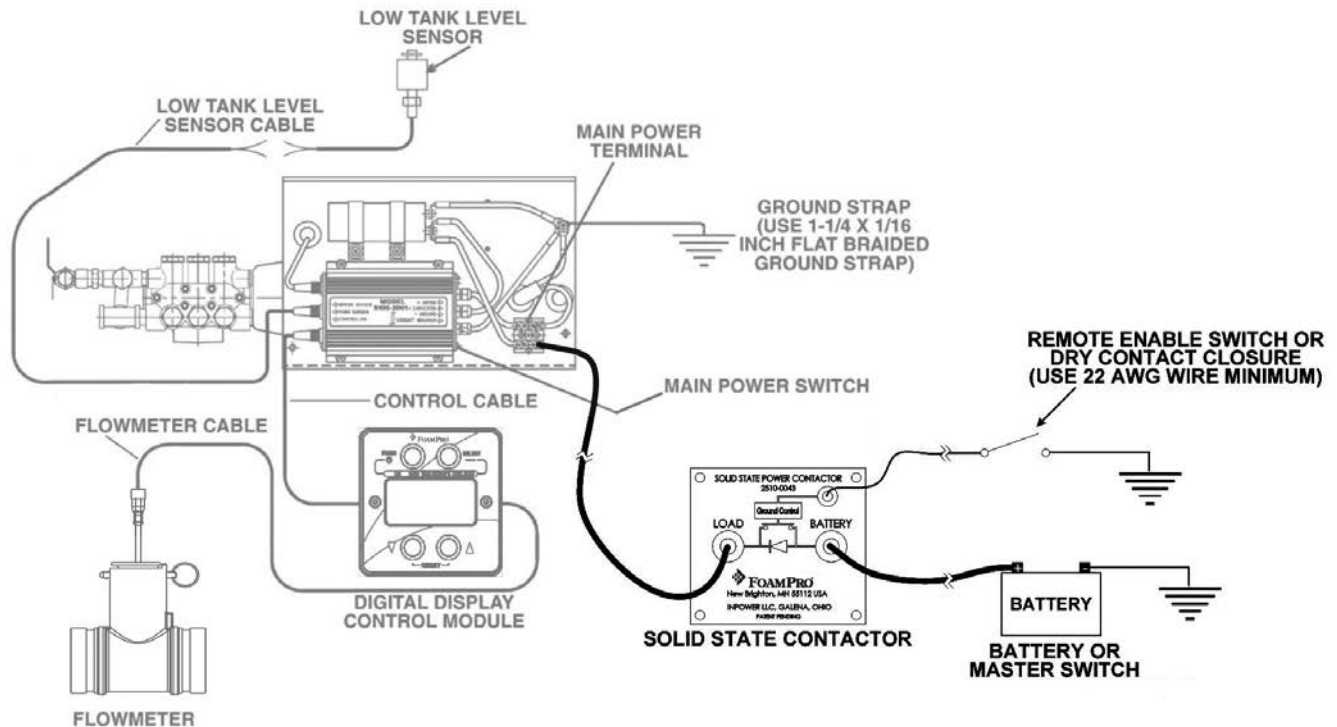

375 Fifth Avenue NW • New Brighton, Minnesota 55112 USA
 Phone: (651) 766-6300 • 800-533-9511 • Fax: (651) 766-6614
 foampro@pentair.com • www.foampro.com