

Dual-Injection System

Flexibility on Demand



*With the flip of a switch,
you can now select between
two different injection
points with your new
or existing 2000 Series
FoamPro system!*

Features & Benefits:

- Choose between two different injection points
- Ideal for separately piped manifolds of different sizes
- Reliable FoamPro accuracy on either line
- Complete integration of microprocessor functions
- Optional on FoamPro 2000 Series systems - new or retrofit
- 12 or 24 volt options



FoamPro Dual-Injection System

SPECIFICATIONS

Flexibility on Demand

Kit contains:

A Dual-Injection Selector Module

Switch activates one of two solenoid-operated valves, which determine where concentrate is injected into the line. Module directly interfaces with MultiFlo control.

Two Solenoid Valves

Valves direct foam concentrate to one of two injection points.

An Injection Check Valve

Check valve prevents backflow into concentrate supply piping.


Three Control Cables

Cables connect the MultiFlo interface, the flowmeters and the dual-injection selector module.

NOTE: In addition to the above components, dual-injection installations require a MultiFlo interface, two flowmeters and two main waterway check valves sized for your application.



System Diagram

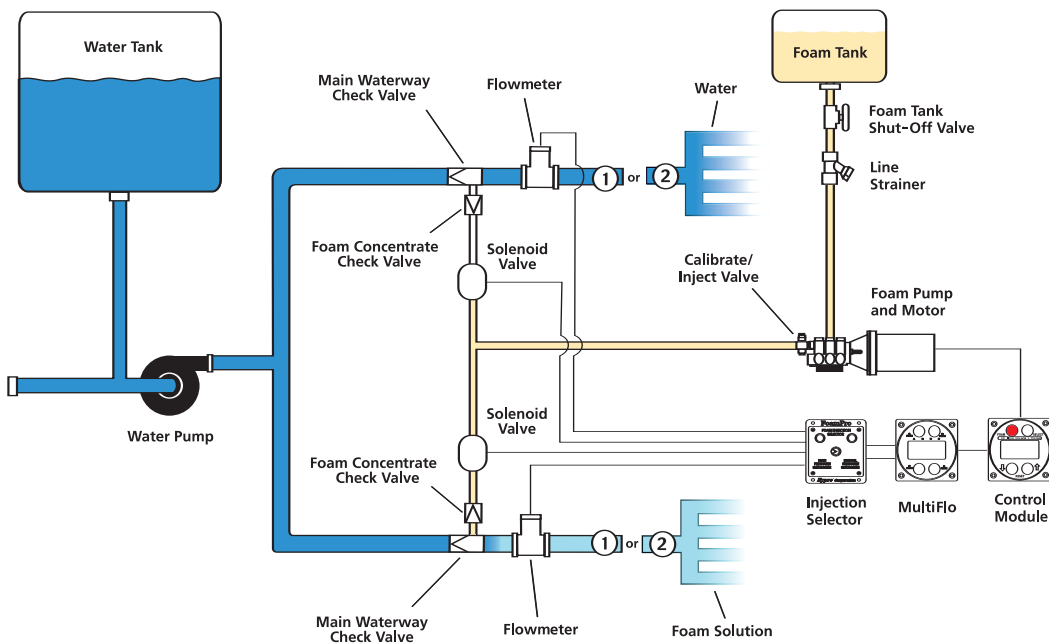

HYPRO
Pentair Water

375 Fifth Avenue NW • New Brighton, MN 55112
Phone: (651) 766-6300 • 800-533-9511 • Fax: (651) 766-6614
www.foampro.com